


# GreenMaster 600

## 6.0 metres hydraulic folding

For pasture maintenance, overseeding and seeding of new swards

### Standard equipment:

- 2-rows NonStop-tines Ø12 mm, space between tines 75 mm
- Protection against loss of tines
- Hydraulic folding
- 4 Double gauge wheels with scrapers
- Headstock Cat. 2 and 3
- Road lighting kit (LED)
- Coupling kit STANDARD for trailed roller
- **U-stands for storage out of season**

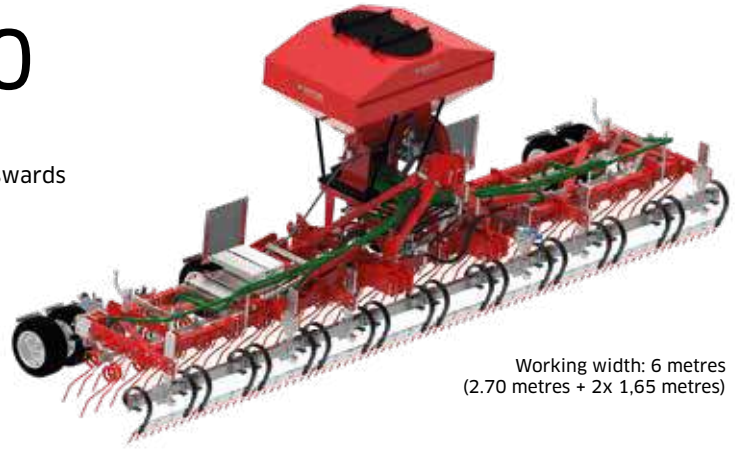

Working width: 6 metres  
(2.70 metres + 2x 1,65 metres)

### Standard machine

Type	Working width	Transport width	Transport height	Weight	Item Num.	Price excl. VAT
GreenMaster Harrow 600	6.00 m	3.00 m	3.10 m*	1,000 kg	4600 0165	

\* Transport height with ground clearance of 0.25 metres

### Options for harrow

Type	Working width	Note	Weight	Item Num.	Price excl. VAT
Levelling bar 600	6.00 m	For levelling, <b>for self-assembly</b>	250 kg	4600 1086	
Ripperboard 600 QUATTRO	6.00 m	For remediation, <b>for self-assembly</b>	320 kg	4600 1849	
Coupling kit PREMIUM		For trailed roller, <b>mounted ex factory</b>	20 kg	4600 1602	
Coupling kit PREMIUM, retrofit kit		For trailed roller, <b>for self-assembly</b>	20 kg	4600 1604	
Connecting pipe for air brakes of the roller		<b>for self-assembly</b>	10 kg	7400 1011	

### Pneumatic seeder

Type	Note	Weight	Item Num.	Price excl. VAT
410 litres 90° electrical fan	Descript. see page 20, <b>mounted ex factory</b>	90 kg	8202 2040-1	
410 litres 90° hydraulic fan	Descript. see page 20, <b>mounted ex factory</b>	100 kg	8202 2043-1	
410 litres 90° mechanical fan	Descript see page 20, <b>w/o drive shaft, mounted ex factory</b>	110 kg	8202 2036-1	
660 litres hydraulic fan	Descript see page 20, <b>mounted ex factory</b>	130 kg	8202 2041-1	
660 litres mechanical fan	Descript see page 20, <b>w/o drive shaft, mounted ex factory</b>	140 kg	8202 2037-1	
Console GreenMaster 600 for Pneumatic seeder 410 litres	For mounting the Pneumatic seeder 410 litres on the GreenMaster 600, <b>mounted ex factory</b>	90 kg	8202 2141	
Adapter plate for 660 litre	For mounting the Pneumatic seeder 660 litres on the console for the Pneumatic seeder 410 litres, <b>mounted ex factory</b>	10 kg	7400 2141	

### Optional extras for Pneumatic seeder Further options for Pneumatic seeder see pages 20-21.

Descriptor	Note	Item Num.	Price excl. VAT
Area meter (ha)	Day- and total counter battery-powered, <b>for self-assembly</b>	7006 0601	
Electrical seed rate setting	Seed rate adjustable from the tractor cab, <b>for self-assembly</b>	8202 2072	
Hydraulic lifting for ground wheel	For <b>GreenMaster 600 + 750 + 800</b> with ground wheel, <b>for self-assembly</b> Required hydraulic connection: 1x single acting	78432 9027	
Drive shaft 1010 mm	To drive the mechanical fan	8202 2149	

### Total GreenMaster 600

Examples	Weight	Price excl. VAT
GreenMaster harrow 600 + Levelling bar 600 + Pneumatic seeder 410 litres electric	1,445 kg	
GreenMaster harrow 600 + Levelling bar 600 + Pneumatic seeder 410 litres hydraulic	1,455 kg	
GreenMaster harrow 600 + Levelling bar 600 + Pneumatic seeder 410 litres mechanical	1,465 kg	
GreenMaster harrow 600 + Levelling bar 600 + Pneumatic seeder 660 litres hydraulic	1,495 kg	
GreenMaster harrow 600 + Ripperboard 600 QUATTRO + Pneumatic seeder 410 litres electric	1,515 kg	
GreenMaster harrow 600 + Ripperboard 600 QUATTRO + Pneumatic seeder 410 litres hydraulic	1,525 kg	
GreenMaster harrow 600 + Ripperboard 600 QUATTRO + Pneumatic seeder 410 litres mechanical	1,535 kg	
GreenMaster harrow 600 + Ripperboard 600 QUATTRO + Pneumatic seeder 660 litres hydraulic	1,565 kg	

### Additional information

Additional information	Note
Assembly time for completion:	Mounting of levelling bar or Ripperboard approx. 1,0 h.