

SPEARHEAD

MULTICUT 300



MULTICUT 300 FEATURES



TRACTOR HP

50hp



PTO SPEED

1000rpm



TRANSPORT WIDTH

3.03m /
120"



CUTTING WIDTH

2.84m /
112"



GEARBOX RATING

130hp
& 111hp



NO. OF WHEELS

2



NO. OF ROTORS

2



NO. OF BLADES

4



CUTTING HEIGHT

10 - 350mm
0.5" - 14"


MULTICUT 300

UNIT OPTIONS



FRONT MOUNT KIT

A PROFESSIONAL FINISH ON THE ROUGHEST OF TERRAIN

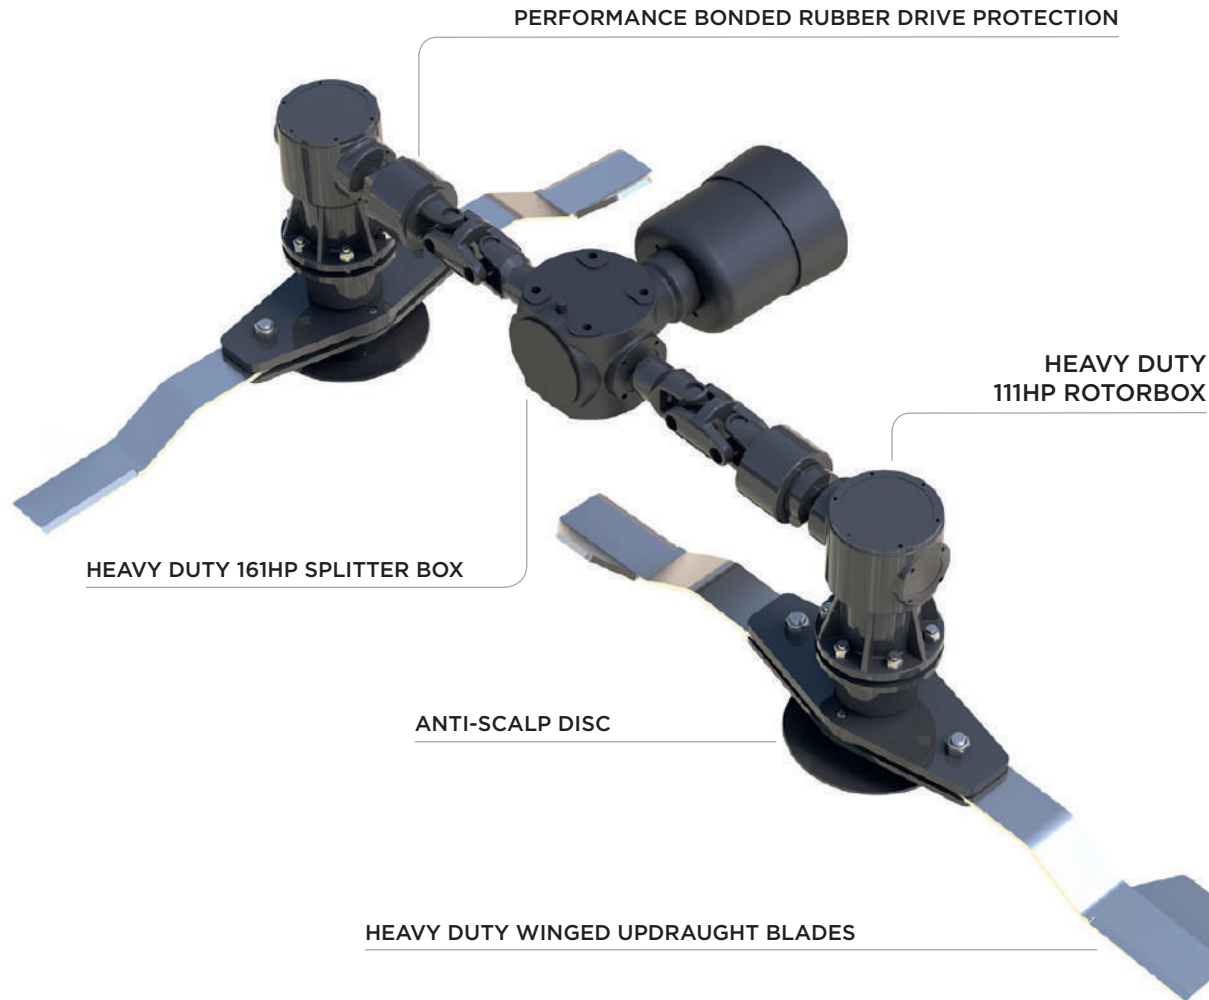

The Multicut 300 is of extremely robust construction, designed and built specifically for the rigorous conditions of set-aside, general mowing and scrub clearance.

The twin rotors, each with massive double blade holders and robust 12 millimetre thick spring steel blades are capable of cutting and mulching scrub up to 100 millimetre thickness.

Like all Spearhead machines the underside of the deck is also important; providing a uniform full width fanned spread of mulched mowings leaving a very professional finish on the roughest of terrain.

The floating linkage combined with the wide full length skids and trailing wheels ensures the machine follows the most uneven ground contours and a special shaft drive system throughout ensures a positive transmission for maximum efficiency and total reliability.

SPECIFICATION		MULTICUT 300	
Machine weight*	1050kg / 2315lbs	Deck construction	All welded construction
Hitch	Category 2 with floating clevis top link	Deck material thickness	5mm (3/16")
Cutting width	2.84m / 112"	Side skirt material thickness	6mm (1/4")
Overall width	3.03m / 120"	Anti-scalp dish	5mm (3/16") round pan with blade holder bar
Overall length	2.73m / 108"	Blades (x6)	12mm (1/2") 30 Carbon Boron hardened and tempered. Free swinging high lift - low friction
Deck height**	0.24m / 10"	Blade bolts	M24 C/W shank grade 8.8
Cutting height	10mm - 350mm (1/2" - 14")	Blade tip speed	85mps / 16734fpm
Cutting capacity	100mm / 4"	Driveline	ASAE Category 4
Recommended tractor HP	50hp / 37kW	Driveline protection	Automatic torque limiter
Power take-off speed	1000rpm	Tailwheel mount assemblies	Welded box section arm and caster fork with 360 degree swivel
Gearboxes (x3)	Cast Iron housing	Tailwheels (x2)	5.00-8 rubber tyre with steel hub
Input shaft	1" 3/8 Z6 input shaft	Front guard	Single, two-piece chain guard
Gearbox lubricant	EP80-90W or GL-4 / GL-5 oil	Rear guard	Single chain guard
Gearbox oil capacity [splitter gearbox]	1.7 litres / 3.0 pints		
Gearbox oil capacity [rotor gearboxes (x2)]	2.1 litres / 3.7 pints		

*With front and rear single chain guards ** Underside of deck to skid

SPEARHEAD

📍 Station Road, Salford Priors, Evesham, Worcestershire, WR11 8SW, England ☎ +44 (0)1789 491860

✉ enquiries@spearheadmachinery.com 📧 spearheadmachinery.com 🐦 📘 SpearheadWorld



designed and built in
GREAT BRITAIN



Spearhead
is a member of the
Alamo Group