

SPEARHEAD

TWIGA CLASSIC



Vegetation Control – it’s in our makeup!

At Spearhead we are passionate about vegetation control machinery, it is a part of our makeup and it is what we have done best for more than 25 years.

Twiga Reach Arm Mowers.

Since the launch of the Twiga series back in 1995, Spearhead has pioneered the development of reach mowers to create a vast product range to suit varying different budget types and applications. From machines designed to fit compact tractors through to the longest reach machines for watercourse management; there is a model for every landscape.

Twiga reach arms extend from a minimum of 3.2m to a maximum 8.9m, with a variety of arm types and machine control options to suit every operator’s requirements.

Spearhead’s diverse range of reach arm attachments complement the Twiga range, with flail heads between 1.0 and 1.6m for all hedge cutting and verge mowing purposes along with a variety of rotary heads and sawblades to suit every working requirement.

Be it an agricultural or municipal application, Spearhead sets the standard in reach mowing and hedge cutting machinery solutions.



Overview	4
Features	6
Dimensions	7
Arm Types	8
Mounting	9
Control Systems	10
Machine Features	11
Optional Equipment	12
ATTACHMENTS	
Flail Heads	14
Cutterbars	18
Sawblades	19
Rotary Finishing Heads	20
Ditch Cleaners	23
Specifications	24

VIEW OUR OTHER TWIGA RANGES

TWIGA COMPACT

TWIGA MID

TWIGA PRO






TWIGA FLEX

TWIGA ORBITAL



With Spearhead's renowned quality and robustness and many of the best features found in Professional Twiga models, the Twiga Classic hedge cutter range offers the best combination of specification and value for money on the market.

Perfect for farmers, contractors and local authorities, the Twiga Classic range is available in reaches between 5.0m and 6.5m, with various operating characteristics depending on model. All machines are rear mounted and feature parallel arm geometry as standard to create a machine which can be made to suit every working eventuality.

Precise control and all-day operator comfort is given through Spearhead's Pilot Hydraulic Proportional Control System as standard. In combination with a 65hp hydraulic system, and the ability of fitting a diverse range of attachment options, the Twiga Classic is the tool for any job.

	 TRACTOR POWER REQUIRED	 TRACTOR WEIGHT	 MACHINE POWER	 MACHINE WEIGHT	 MAXIMUM REACH	 TRANSPORT WIDTH
TWIGA CLASSIC S50	80hp	2800kg	65hp	1100kg	4.9m / 16' 1"	2.2m / 7' 3"
TWIGA CLASSIC S51	80hp	3250kg	65hp	1200kg	4.9m / 16' 1"	2.2m / 7' 3"
TWIGA CLASSIC S55	80hp	3500kg	65hp	1230kg	5.5m / 18' 0"	2.2m / 7' 3"
TWIGA CLASSIC FR55	80hp	3750kg	65hp	1280kg	5.5m / 18' 0"	2.3m / 7' 7"
TWIGA CLASSIC VFR55	80hp	3750kg	65hp	1320kg	5.5m / 18' 0"	2.3m / 7' 7"
TWIGA CLASSIC S60	80hp	3750kg	65hp	1250kg	5.9m / 19' 4"	2.2m / 7' 3"
TWIGA CLASSIC FR60	80hp	4000kg	65hp	1310kg	5.9m / 19' 4"	2.3m / 7' 7"
TWIGA CLASSIC VFR60	80hp	4000kg	65hp	1340kg	5.9m / 19' 4"	2.3m / 7' 7"
TWIGA CLASSIC T65	80hp	4250kg	65hp	1310kg	6.4m / 21' 0"	2.2m / 7' 3"



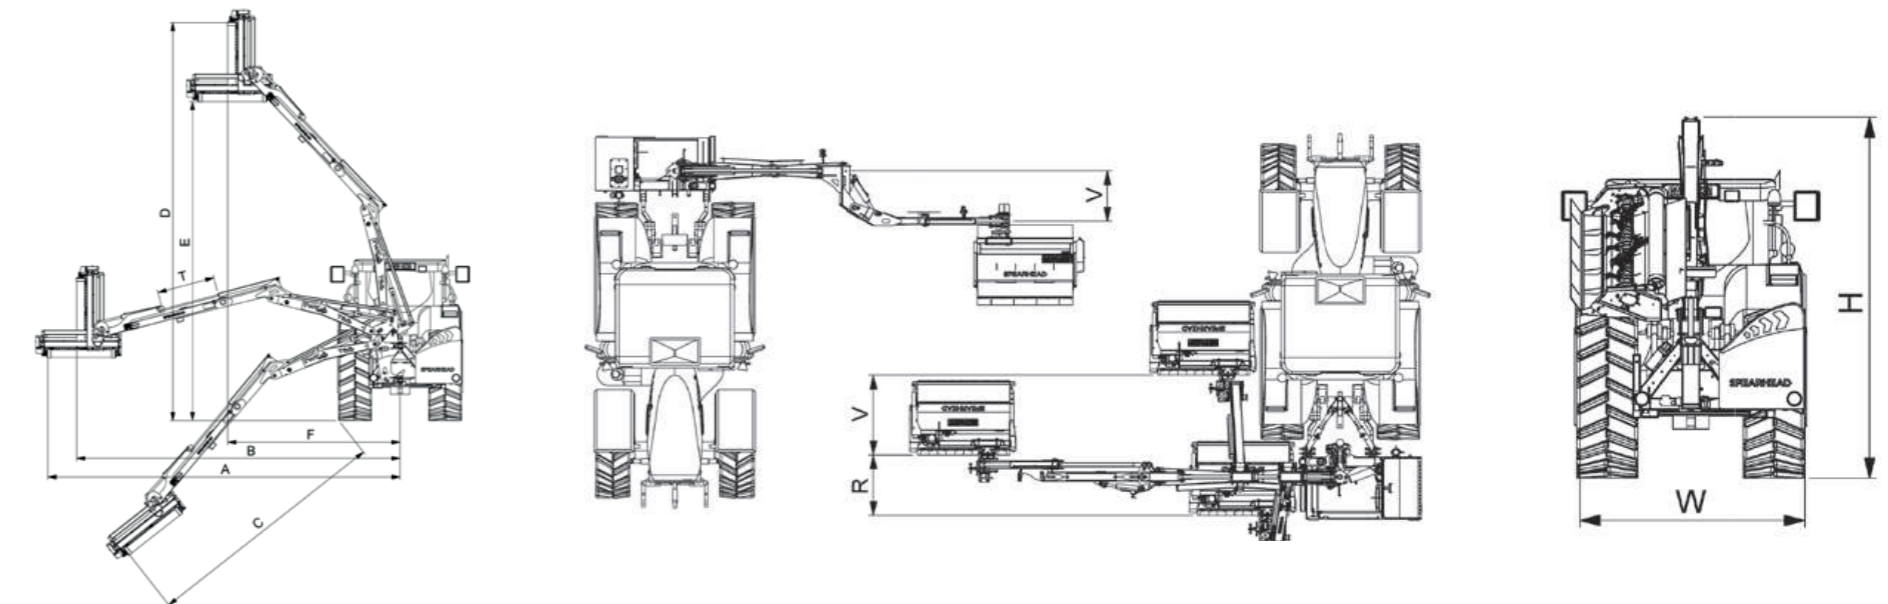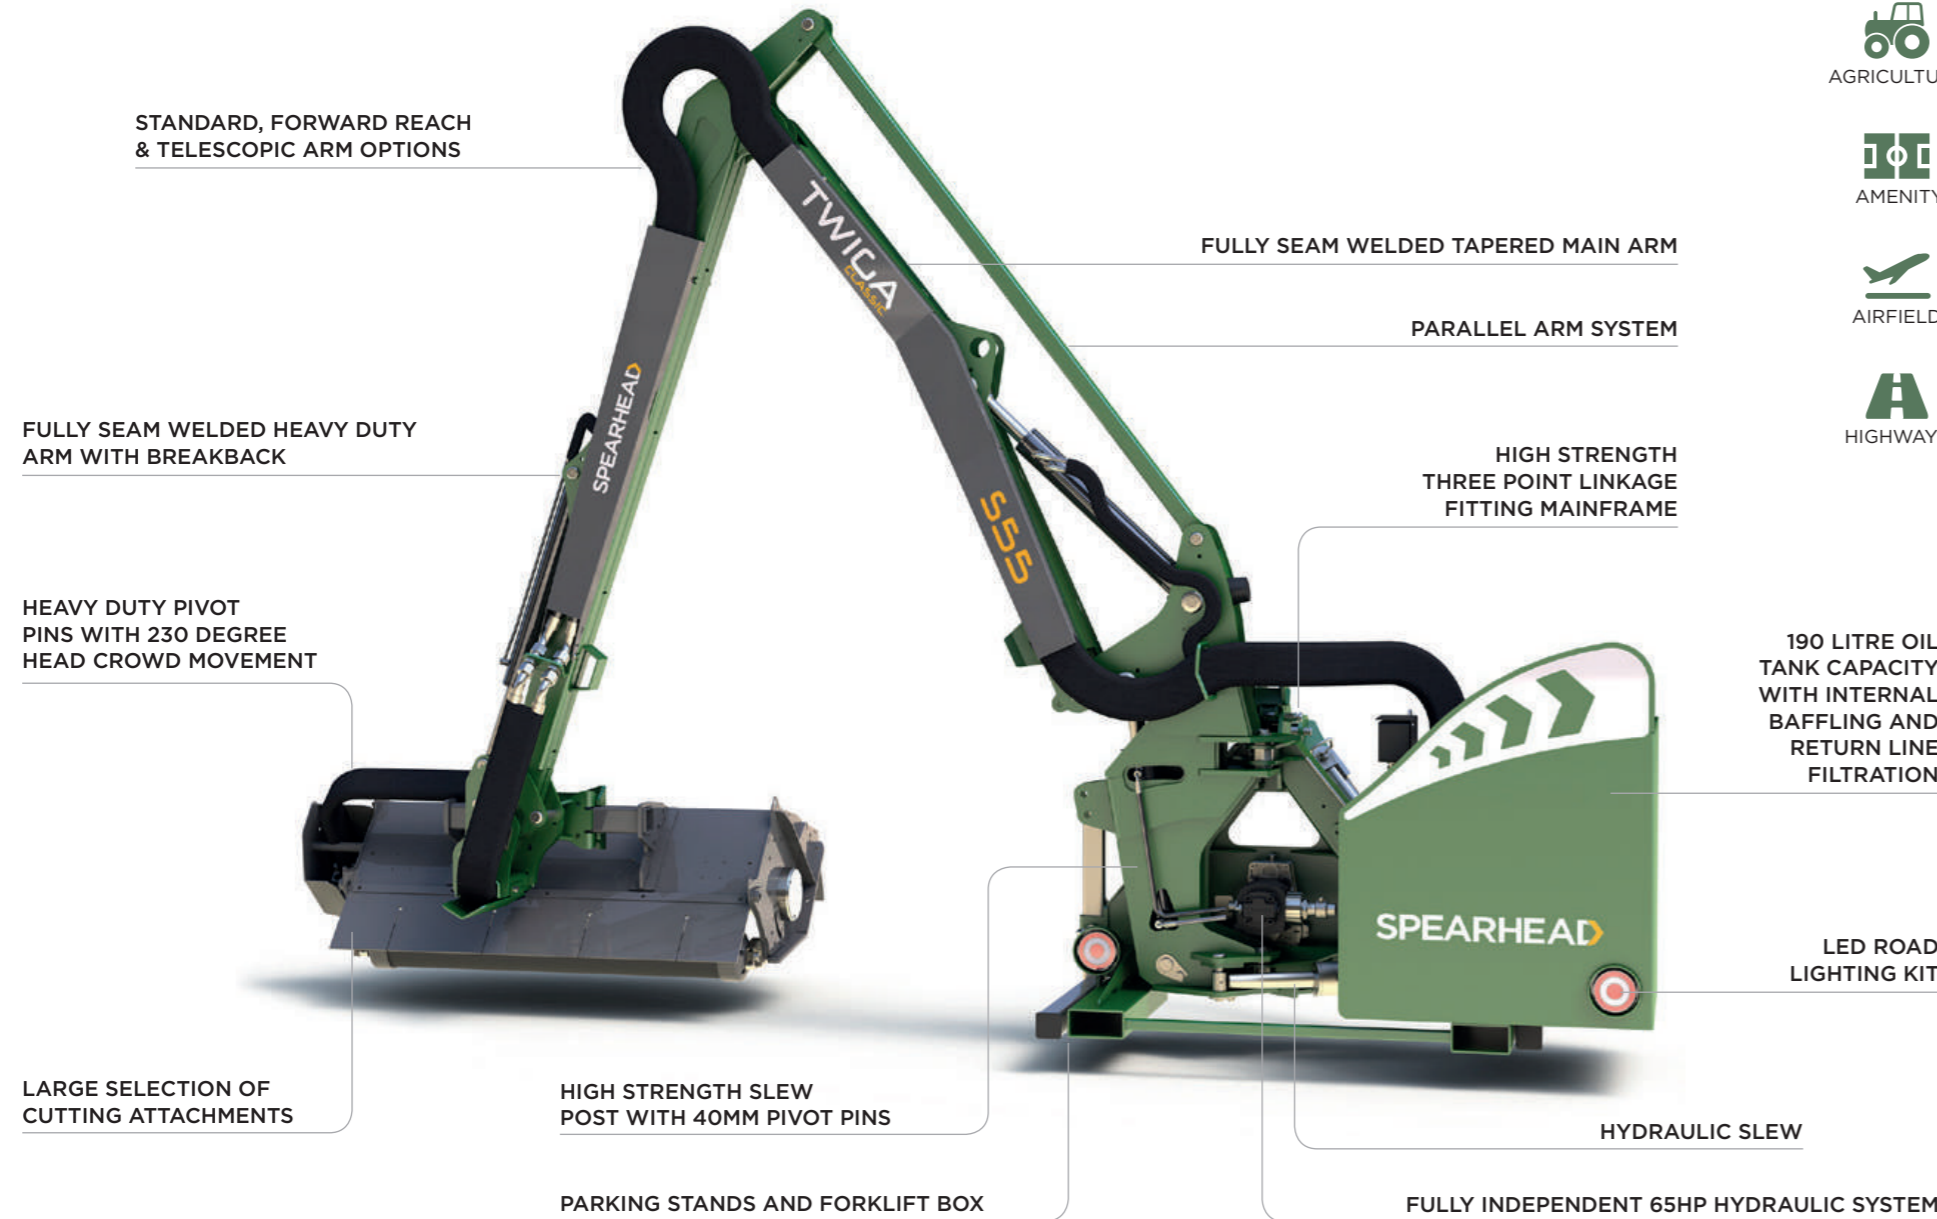

	A	B	C	D	E	F	W	H	T	V	R
TWIGA CLASSIC S50	4.9m / 16' 1"	4.4m / 14' 5"	3.2m / 10' 6"	5.9m / 19' 4"	4.5m / 14' 9"	2.2m / 7' 3"	2.2m / 7' 3"	3.0m / 9' 11"	-	-	-
TWIGA CLASSIC S51	4.9m / 16' 1"	4.4m / 14' 5"	3.2m / 10' 6"	5.9m / 19' 4"	4.5m / 14' 9"	2.2m / 7' 3"	2.2m / 7' 3"	3.0m / 9' 11"	-	-	-
TWIGA CLASSIC S55	5.5m / 18' 0"	4.9m / 16' 1"	3.6m / 11' 10"	6.5m / 21' 4"	5.1m / 16' 9"	2.5m / 8' 2"	2.2m / 7' 3"	3.5m / 11' 6"	-	-	-
TWIGA CLASSIC FR55	5.5m / 18' 0"	4.9m / 16' 1"	3.6m / 11' 10"	6.5m / 21' 4"	5.1m / 16' 9"	2.5m / 8' 2"	2.3m / 7' 7"	3.4m / 11' 2"	-	0.7m / 2' 4"	-
TWIGA CLASSIC VFR55	5.5m / 18' 0"	5.0m / 16' 5"	3.7m / 12' 2"	6.5m / 21' 4"	5.1m / 16' 9"	2.4m / 8' 2"	2.3m / 7' 7"	3.3m / 10' 10"	-	1.1m / 3' 7"	0.9m / 2' 11"
TWIGA CLASSIC S60	5.9m / 19' 4"	5.3m / 17' 5"	4.0m / 13' 1"	6.8m / 22' 4"	5.4m / 17' 8"	2.7m / 8' 10"	2.2m / 7' 3"	3.5m / 11' 6"	-	-	-
TWIGA CLASSIC FR60	5.9m / 19' 4"	5.4m / 17' 9"	4.1m / 13' 5"	6.9m / 22' 8"	5.5m / 18' 1"	2.6m / 8' 6"	2.3m / 7' 7"	3.4m / 11' 2"	-	0.7m / 2' 4"	-
TWIGA CLASSIC VFR60	5.9m / 19' 4"	5.4m / 17' 9"	4.1m / 13' 5"	7.0m / 22' 11"	5.5m / 18' 1"	2.5m / 8' 2"	2.3m / 7' 7"	3.4m / 11' 2"	-	1.1m / 3' 7"	0.9m / 2' 11"
TWIGA CLASSIC T65	6.4m / 21' 0"	5.8m / 19' 0"	4.4m / 14' 5"	7.1m / 23' 3"	5.7m / 18' 8"	3.1m / 10' 2"	2.2m / 7' 3"	3.5m / 11' 6"	0.9m / 2' 11"	-	-

Having pioneered Variable Forward Reach (VFR) technology in the 90's, Spearhead continues to provide the best visibility and control on the market with a selection of arm types now all available on the Twiga classic series.



- S STANDARD**
- › Industry standard
 - › Robust performance
 - › Fully welded tapered design
 - › Superior geometry

- T TELESCOPIC**
- › Compact design
 - › Improved flexibility
 - › Additional reach where required
 - › Easy arm extension



- FR FORWARD REACH**
- › Improved visibility
 - › Full reach in forward position
 - › Folds neatly for transport
 - › Enhanced comfort

- VFR VARIABLE FORWARD REACH**
- › Spearhead innovation
 - › Superior flexibility
 - › Improved visibility
 - › Forward and reverse working range



The Twiga Classic series is available with three alternative mounting options for stable and safe performance. Heavy duty and high strength in design, your Twiga can be easily mounted in minutes.



- THREE POINT LINKAGE**
- › Easy to fit
 - › Heavy duty integrated stabiliser
 - › Adjustable height settings
 - › Pivoting top link nose
 - › Cushioned main frame
 - › Various nose ranges




- FOUR POINT LINKAGE**
- › Upgrade from standard three-point linkage
 - › Additional support from tractor clevis hitch
 - › Improves rigidity and stability



- SUB FRAME AXLE MOUNTS**
- › Retain flexibility of three-point linkage as standard
 - › Secures Twiga to tractor axle for superior rigidity and stability
 - › Reduces wear on tractor and Twiga
 - › Easily fitted


The Twiga Classic series is delivered standard with Pilot, hydraulic proportional controls providing precision operation, excellent comfort and ultimate reliability.

For the basic enthusiast a simple progressive cable control system can be offered as an alternative option.

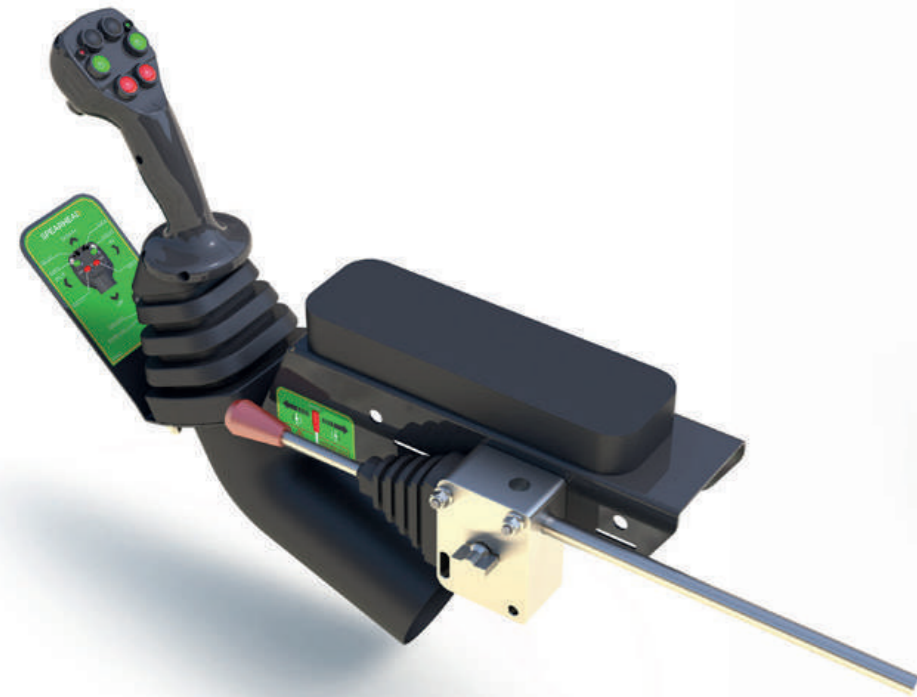

PILOT CONTROLS

- Precision control
- Excellent comfort and feel
- Robust build
- Easy mounting on seat armrest
- Cable rotor control

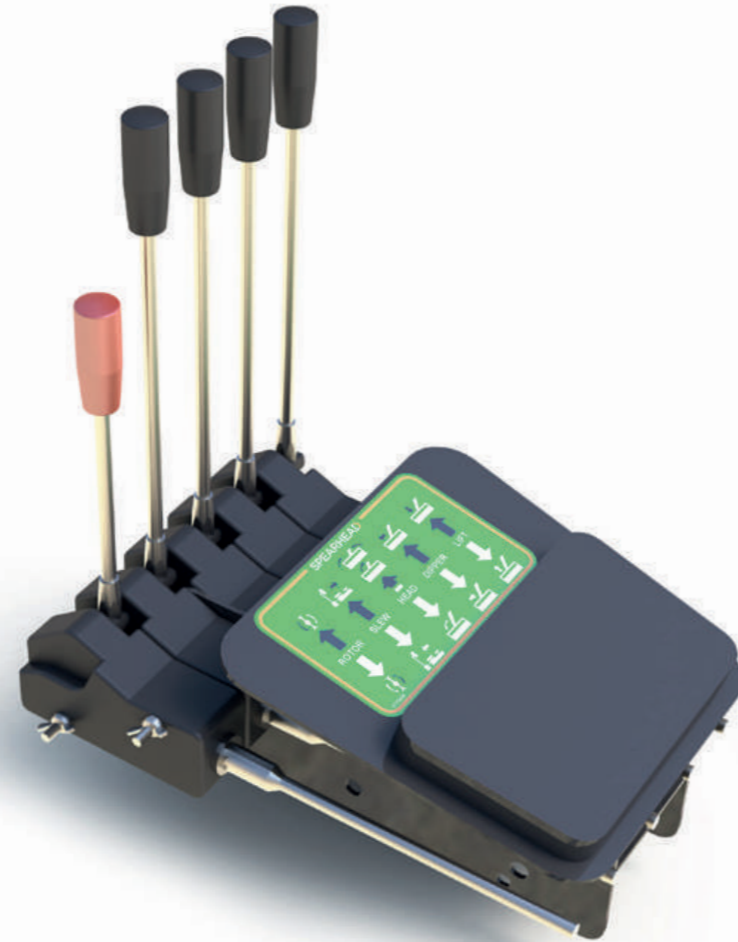


PROGRESSIVE CABLE CONTROLS

- Multi-lever design
- Progressive cable response
- Fingertip operation
- Economic design



PARALLEL ARM SYSTEM

- Allows movement in and out from the tractor without altering the height of the attachment
- Single movement of the joystick required

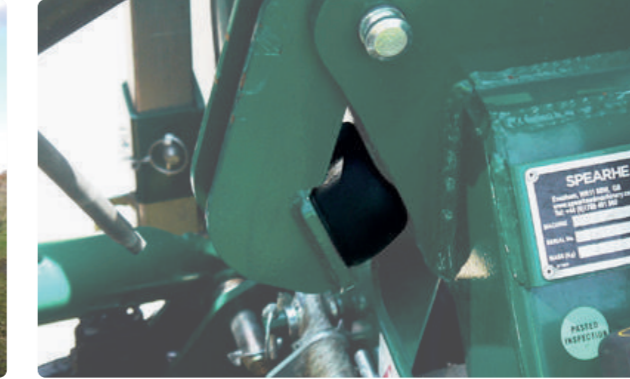


CUSHIONED TOP LINK

- Cushions the mainframe from sway during machine operation
- Reduces stress on machine and tractor during transport



HYDRAULIC SLEW

- Allows for variable movement in the arm during operation
- Allows for compact transportation

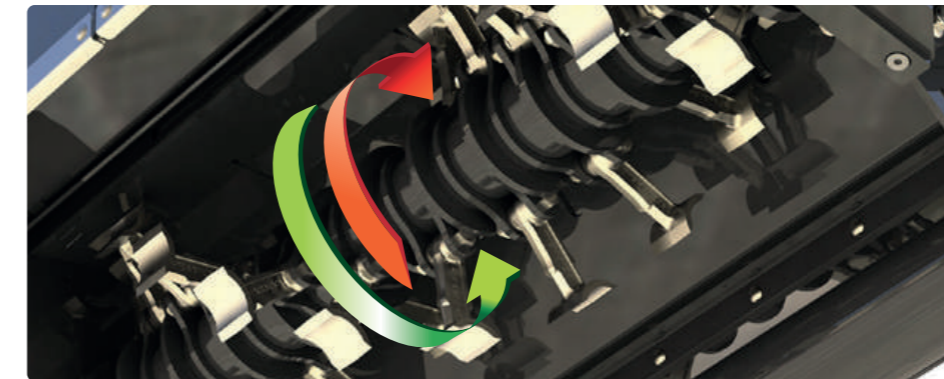


DUAL DIRECTION ROTOR

- Fully independent hydraulics allows for downhill and uphill cutting
- Simple, rotor direction change through lever on controls
- Downhill cutting for heavy-duty mulching to break down heavy growth
- Uphill cutting for cleaner cut and finish



CAB GUARD KIT

- Protects tractor and operator from flying debris
- Standard supply on all machines with universal fitment
- Contains all fasteners and mesh kit

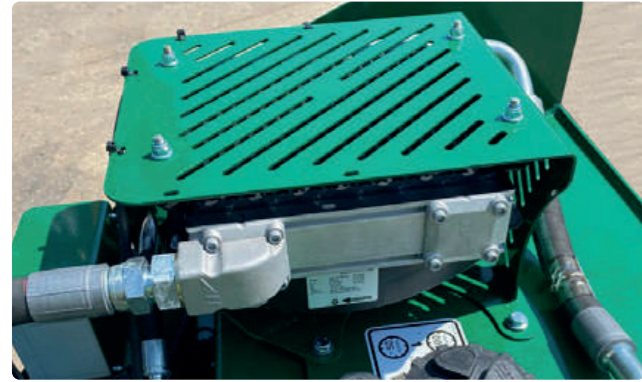

OIL COOLER

- › For machines working in demanding environments
- › Electric temperature sensor
- › Fitted in line and cools oil prior to returning into tank



HEAD FLOAT

- › Greater attachment ability in following changing ground contours across its width
- › Automatically allows the head crowd to change its angling position during work



ARM FLOAT

- › Greater arm ability in following ground contours
- › Automatically allows the arm to fall and raise during work



MECHANICAL QUICK ATTACH

- › Reduced time in changing multiple attachments
- › No requirement for specific tools



HYDRAULIC QUICK ATTACH

- › Quick release probe fittings replace standard adaptors
- › Push and release by hand
- › No requirement for specific tools



DEBRIS BLOWER

- › Blows cut debris back into the hedgerow
- › Fitted to the rear of the oil tank
- › Keeps roads and pathways clear



HIGHWAY KIT Contains:



- › Warning Arrow - magnetic pass sign placed on the rear of the oil tank to guide passing traffic
- › Flashing LED's - additional lighting fitted to the rear panel of the machine increasing visibility
- › Alternative Colour - for the requirements of the end user and/or increased visibility
- › Highway Chevrons - for high visibility during night operations

*Photographs for illustration purposes only.







NARROW LANE BRACKET

- › Fits between arm and attachment
- › Allows the cutting attachment to be brought inside of the width of the tractor
- › Provides an additional arc of operation for the cutting attachments
- › Single ram operation by tractor spool
- › For use on small, single track roads

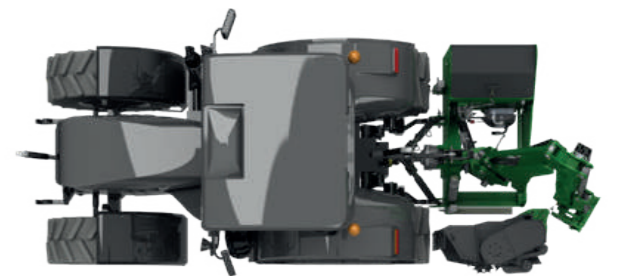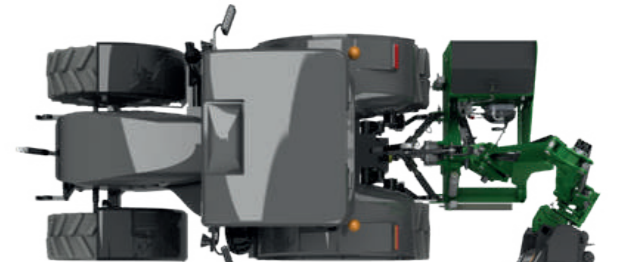




ATTACHMENTS MP1 FLAIL HEAD

The MP1 head is favored by grass mowing professionals with its enclosed cowl, standard wear skirts and compact design. Featuring a host of flail options, this versatile head is also excellent for hedge cutting operations.

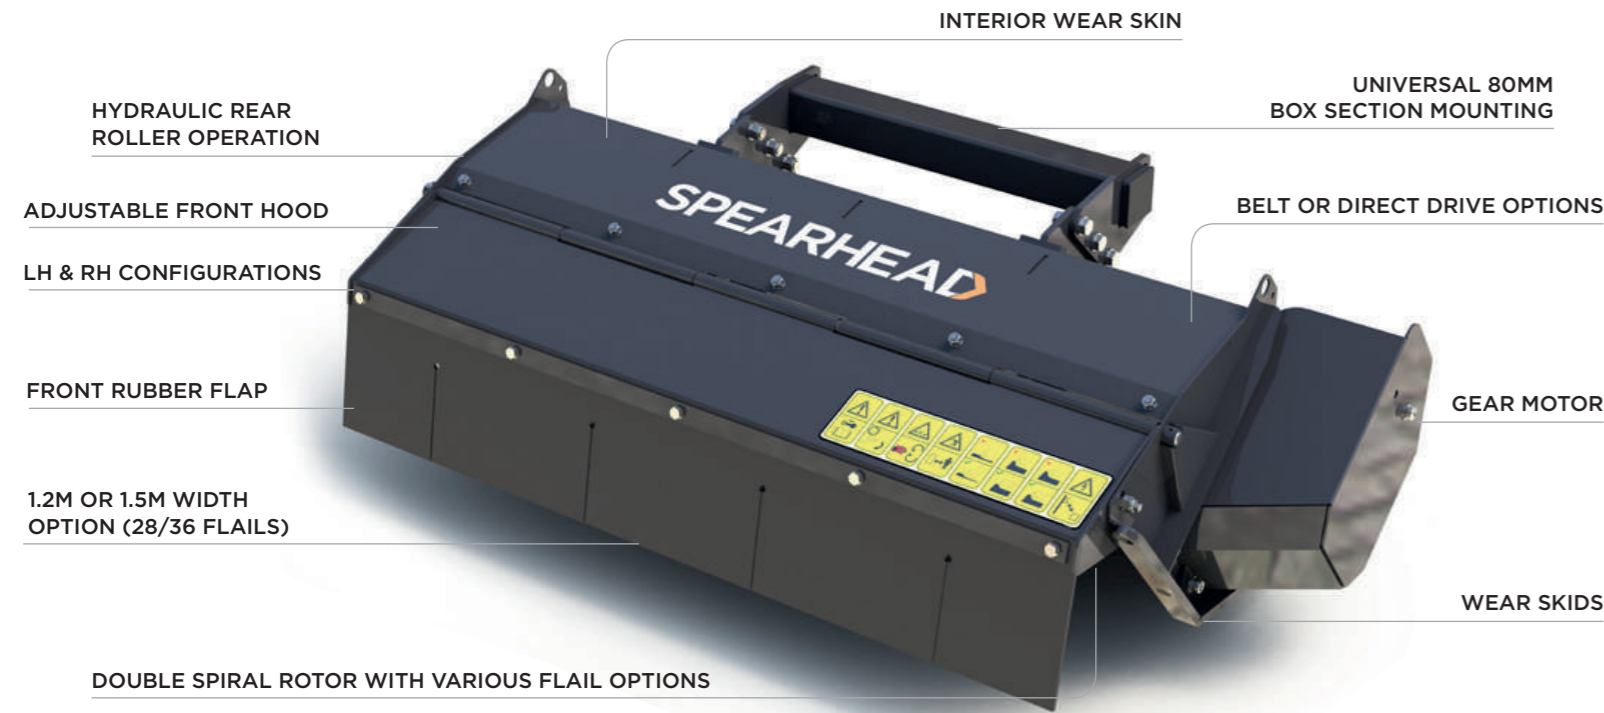

VARIOUS FLAIL OPTIONS:

1. C-Flail
2. Back-to-Back Flail
3. T-Flail
4. Heavy-duty T-Flail
5. Boot Flail




VARIOUS FLAIL OPTIONS:

1. Heavy-duty T-Flail
2. Boot Flail
3. Competition Flail

ATTACHMENTS MP2 FLAIL HEAD

Direct drive, reinforced side walls, an open throat and compact hood, make this head ideal for heavy duty hedge cutting operations.

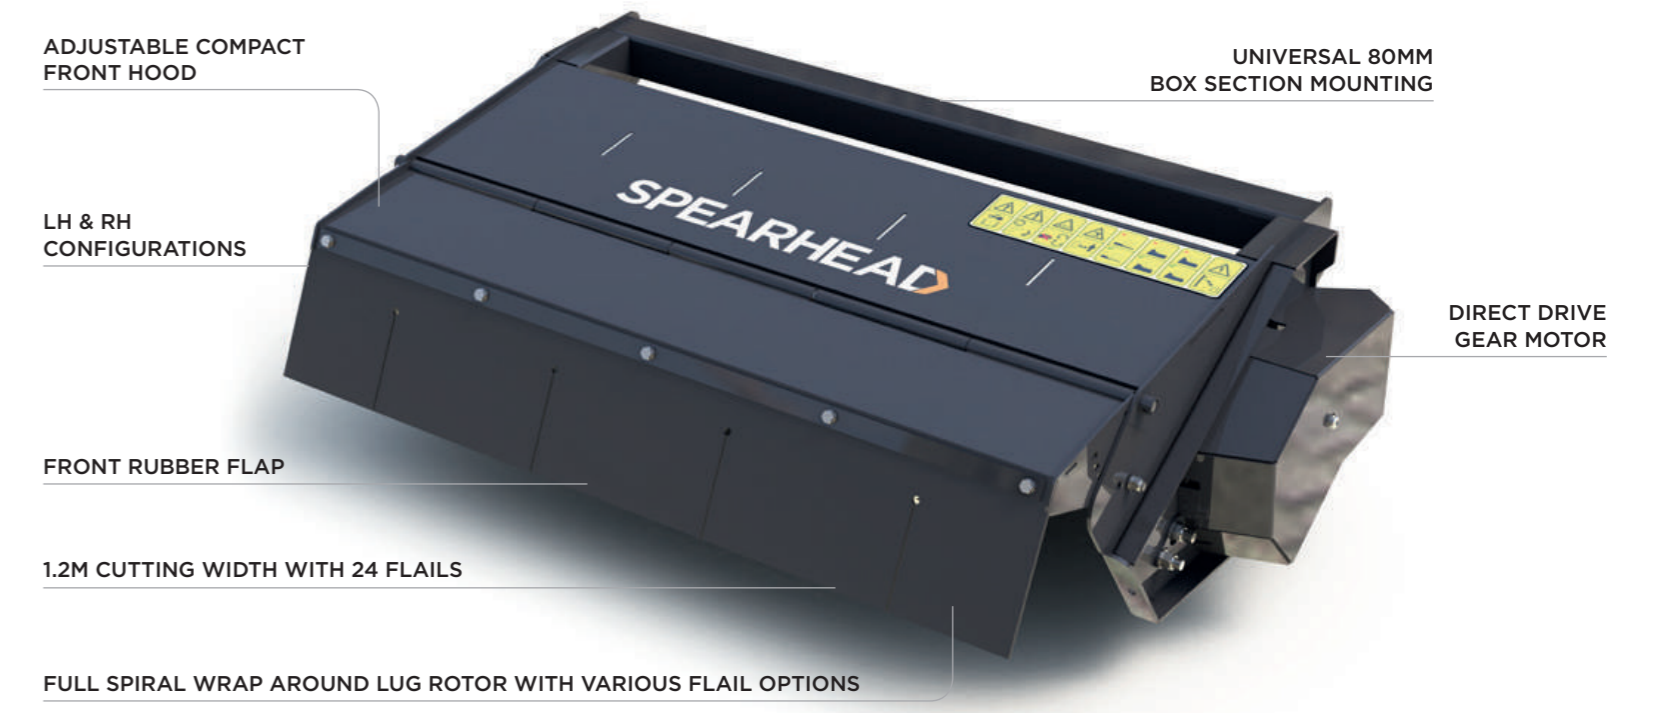

1.2m / 4'



24



-80 - +125mm



GRASS/HEDGE



90 L/min



220 Bar





MP2
FLAIL HEAD

UNIT OPTIONS

MP1
FLAIL HEAD

UNIT OPTIONS



* Dependent on base unit specification

ATTACHMENTS PROJECT BLACK FLAIL HEAD

Belt drive with a maximum 1.6m cutting width, this all-round head is perfect for high output in all applications. Specify with a HD mulching rotor for extreme applications.


LH & RH BUILD CONFIGURATIONS

UNIVERSAL 80MM BOX SECTION MOUNTING

1.2M OR 1.6M CUTTING WIDTH OPTION (24/36 FLAILS)

FRONT RUBBER FLAP WITH EDGE WEAR STRIP

FULL WRAP AROUND LUG ROTOR WITH SPIRAL PATTERN AS STANDARD WITH VARIOUS FLAIL OPTIONS

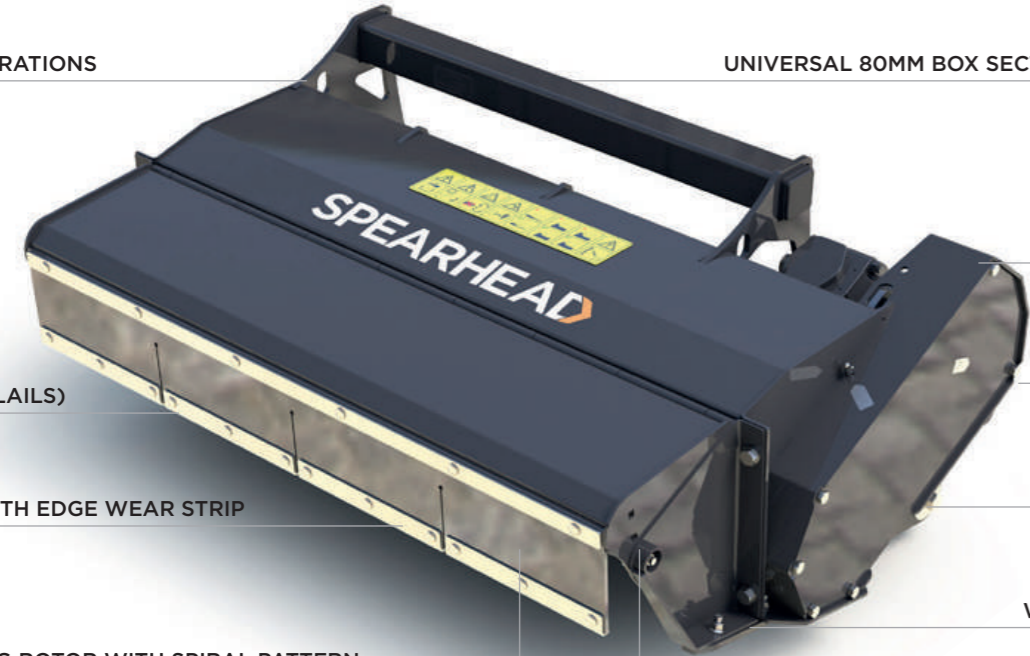


REMOTE GREASING

BELT DRIVEN GEAR MOTOR


HYDRAULIC REAR ROLLER OPTION

WEAR SKIDS


ADJUSTABLE FRONT HOOD




STANDARD SPIRAL ROTOR SHAFT



HD MULCHING ROTOR SHAFT



BELT DRIVE




LH & RH CONFIGURATION



VARIOUS FLAIL OPTIONS:


1. Boot Flail
2. Back-to-Back Flail
3. HD Mulching Flail**
4. Heavy Duty T-Flail




STANDARD CUTTING BLADE



HD CUTTING BLADE

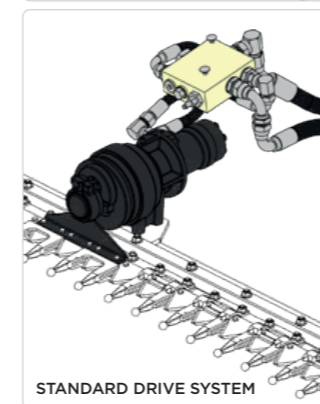

STANDARD DRIVE SYSTEM

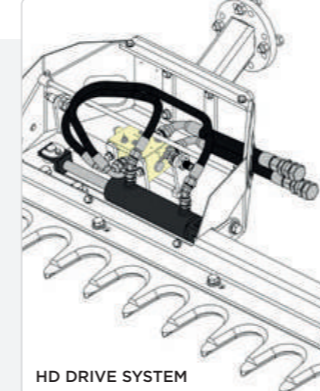

HD DRIVE SYSTEM

ATTACHMENTS CUTTERBARS


Spearhead's range of lightweight standard duty and heavy duty cutterbars are perfect for regular routine hedge cutting maintenance operations.

FULLY ENCLOSED HYDRAULIC SIDESHIFT MECHANISM

SP HD CUTTERBAR

SP CUTTERBAR

SUB 70KG CONSTRUCTION

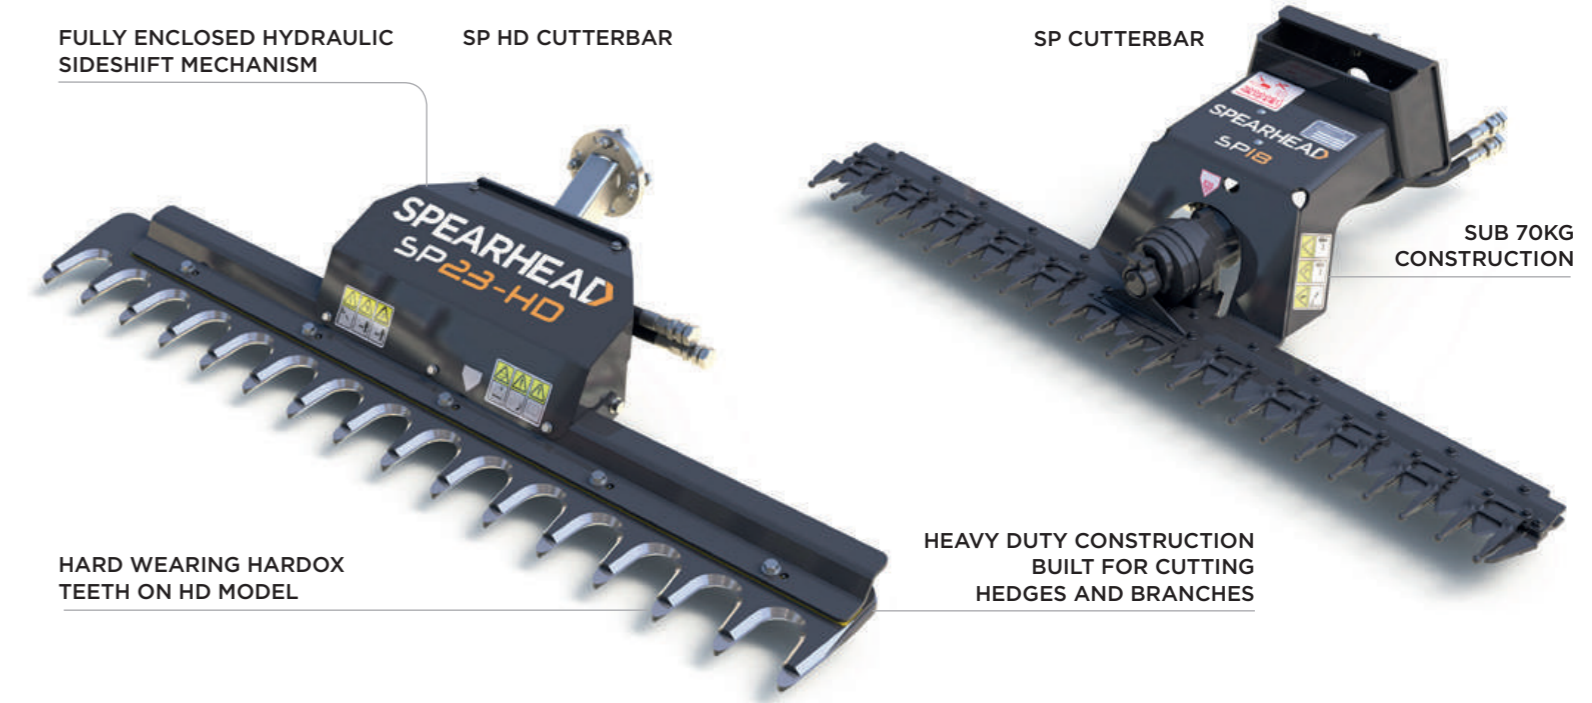

HARD WEARING HARDOX TEETH ON HD MODEL

HEAVY DUTY CONSTRUCTION BUILT FOR CUTTING HEDGES AND BRANCHES

PB FLAIL HEAD

UNIT OPTIONS



CUTTING WIDTH

1.2m / 1.6m or 4' / 5' 3"



NUMBER OF FLAILS

24 or 36



ROLLER CUTTING HEIGHT

-70 - +135mm



APPLICATION

GRASS/HEDGE



MINIMUM FLOW

90 L/min



PRESSURE

220 Bar



FLAILHEAD SKID KIT



HYDRAULIC REAR ROLLER



REAR FLAP



HYDRAULIC FRONT HOOD*

* Dependent on base unit specification

** Only available on HD mulching rotor



CUTTING WIDTH

1.5m / 4' 9"
1.8m / 5' 9"
2.1m / 6' 9"
1.7m / 5' 6"
2.3m / 7' 5"
2.7m / 8' 8"



NO. OF BLADES

19
23
27
26
30
36



CUTTING CAPACITY

40mm
40mm
40mm
100mm
100mm
100mm



APPLICATION

HEDGE
HEDGE
HEDGE
HEDGE
HEDGE
HEDGE



MINIMUM FLOW

50 l/min
50 l/min
50 l/min
50 l/min
50 l/min
50 l/min



PRESSURE

180 bar
180 bar
180 bar
220 Bar
220 Bar
220 Bar

SP15 CUTTERBAR

SP18 CUTTERBAR

SP21 CUTTERBAR




SP17 HD CUTTERBAR

SP23 HD CUTTERBAR

SP27 HD CUTTERBAR


ATTACHMENTS SAWBLADES

Spearhead's Trisaw and Quadsaw sawblades are designed for the felling of larger diameter branches and overgrowth which cannot be cut using the regular flail head, rotary head or cutterbar. Sawblades provide an excellent finish on material up to 200mm in diameter.

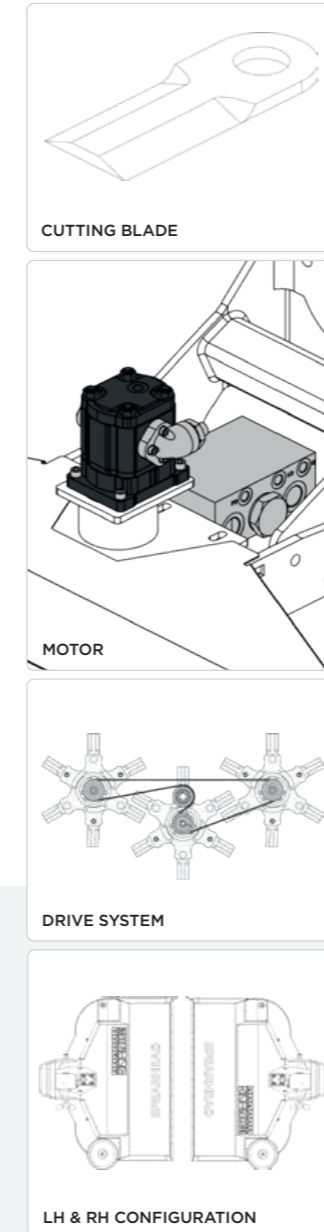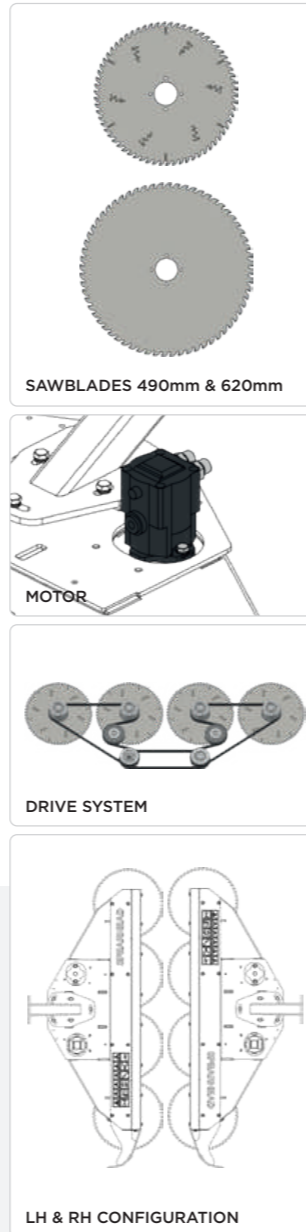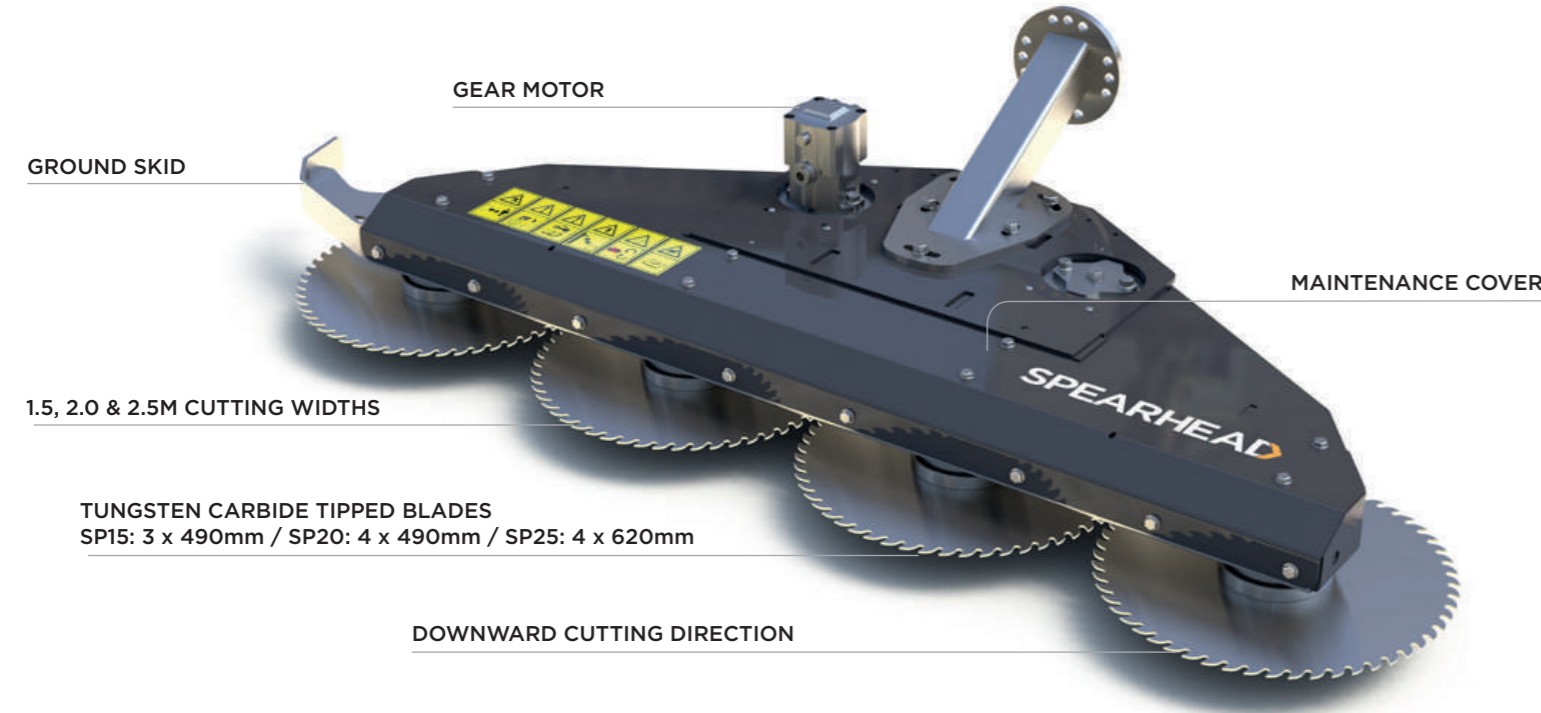

ATTACHMENTS ROTARY FINISHING HEAD

The SP13 rotary finishing head is specifically designed for hedge cutting. With a high mulching capability thanks to its multiple blades, it is the perfect choice for a customer who has a high-quality finish as their highest priority on up to two years growth.

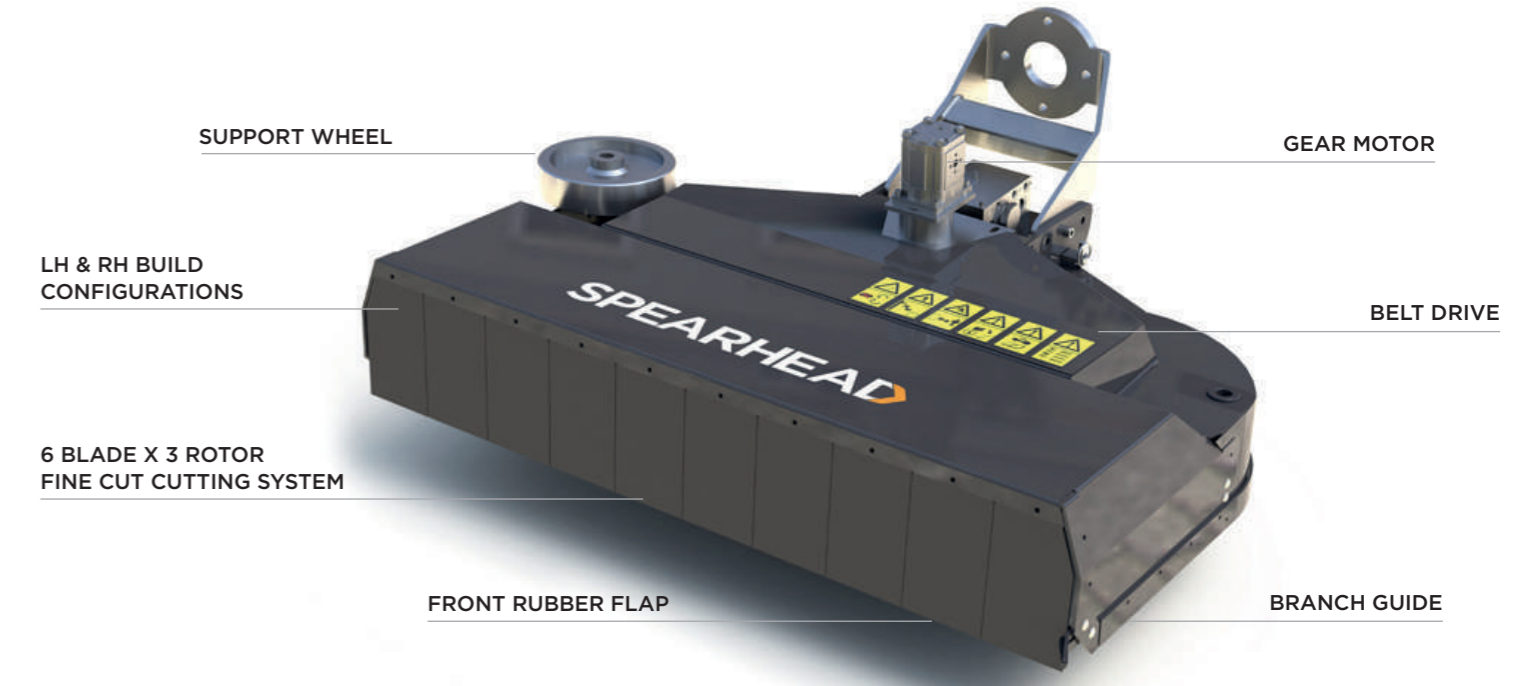

CUTTING WIDTH	NUMBER OF BLADES	CUTTING CAPACITY	APPLICATION	MINIMUM FLOW	PRESSURE
1.3m / 4' 2"	18	30mm / 1.81"	GRASS/HEDGE	45 L/min	180 bar










SP13 FINISHING HEAD

- SP15** TRISAW
- SP20** QUADSAW
- SP25** QUADSAW

CUTTING WIDTH	NUMBER OF BLADES	CUTTING CAPACITY	APPLICATION	MINIMUM FLOW	PRESSURE
1.5m / 4'9"	3	150mm	HEDGE	84-87 L/min	180 bar
2.0m / 6' 5"	4	150mm	HEDGE	84-87 L/min	220 Bar
2.5m / 7' 9"	4	150mm	HEDGE	84-87 L/min	220 Bar


ATTACHMENTS ROTARY HEADS

Spearhead's wide range of rotary heads offer an alternative to the conventional flail head and are utilized in roadside mowing applications where heavier undergrowth and rocks are present.

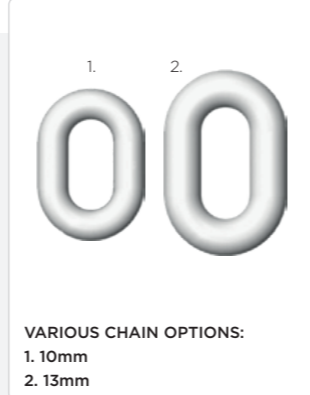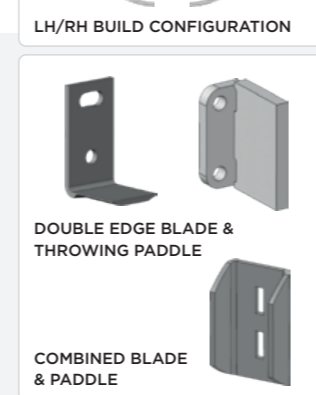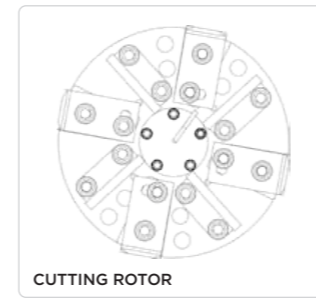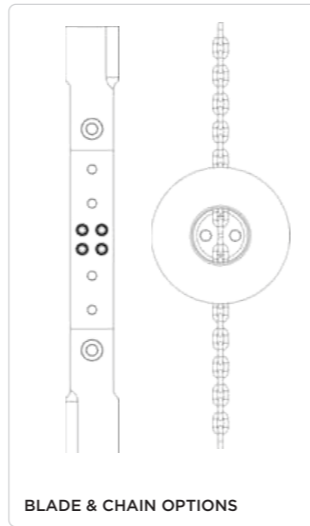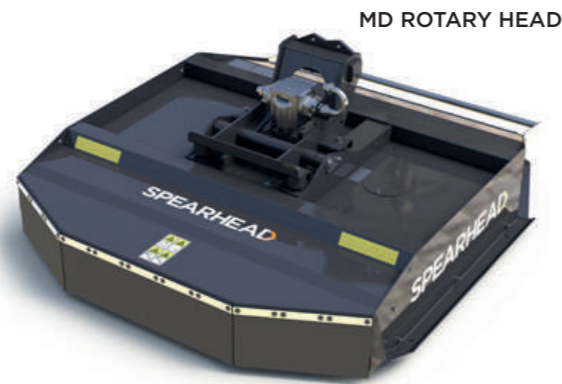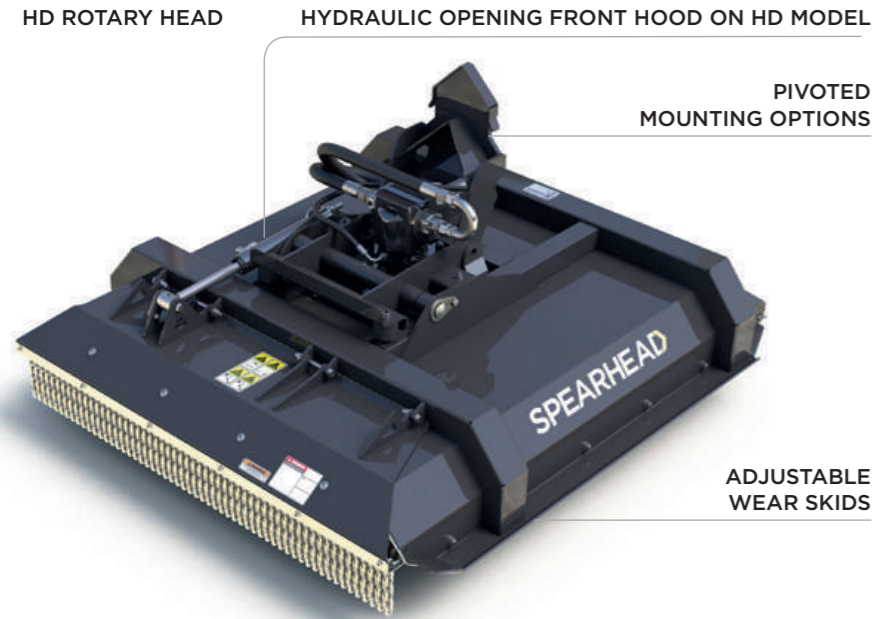

ATTACHMENTS ROTARY DITCH CLEANER

SP Ditch Cleaner is the perfect tool for the cleaning and removal of silt and mud from drainage ditches further expanding the use of your reach arm investment.

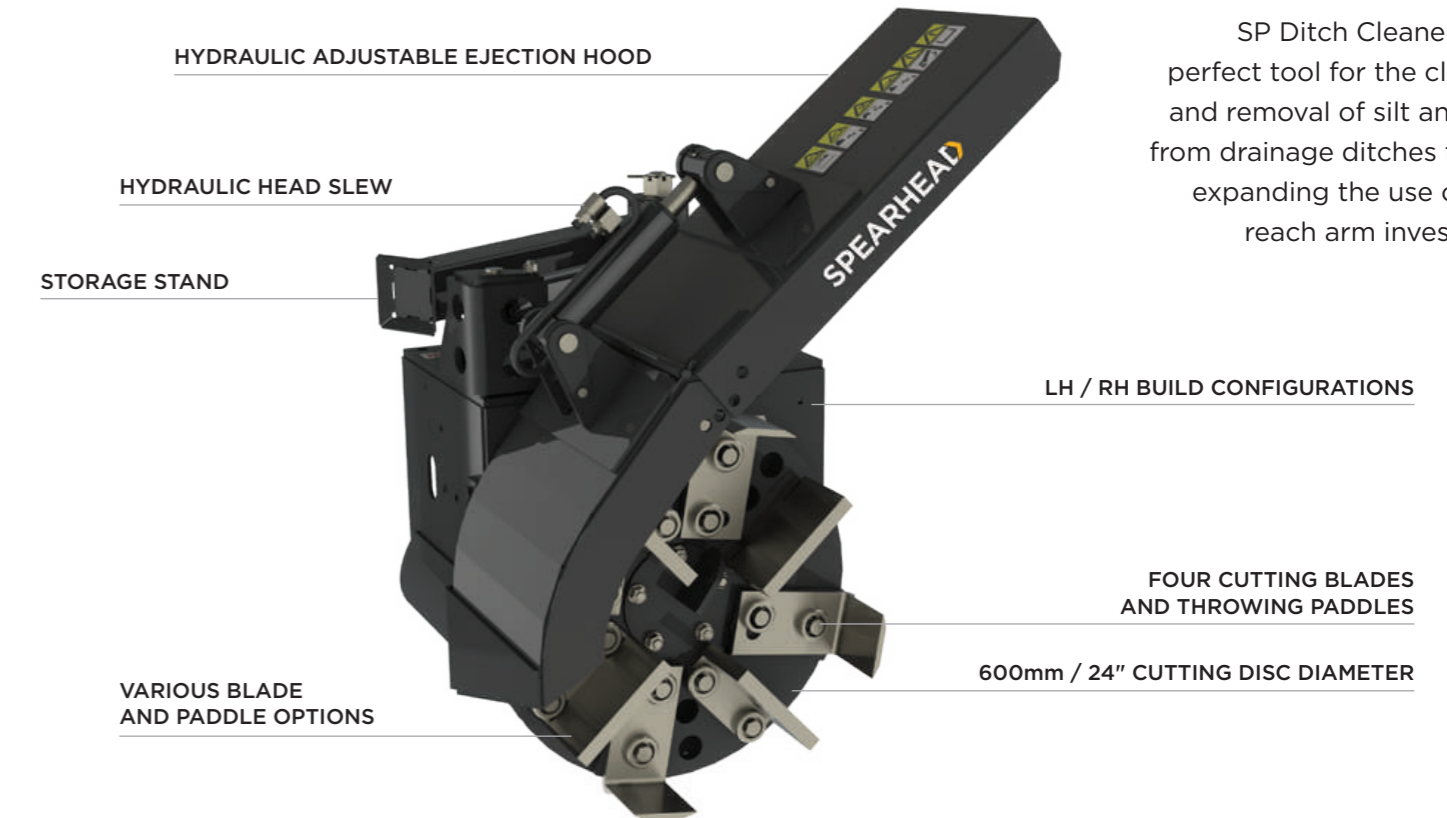

CUTTING DIAMETER	NUMBER OF CUTTING BLADES	APPLICATION	MINIMUM FLOW	PRESSURE
600mm / 24"	4	DITCH/GRIP	90 L/min	220 Bar

SP DITCH CLEANER

	CUTTING WIDTH	NUMBER OF BLADES/CHAINS	CUTTING CAPACITY	CUTTING HEIGHT	APPLICATION	MINIMUM FLOW	PRESSURE
SPI2 MD ROTARY HEAD	1.2m / 3' 11"	2 (blades or chains)	100mm	50-75mm	GRASS/HEDGE	90 L/min	220 Bar
SPI5 MD ROTARY HEAD	1.5m / 4' 11"	2 (blades or chains)	100mm	50-75mm	GRASS/HEDGE	90 L/min	220 Bar
SPI2 HD ROTARY HEAD	1.2m / 3' 11"	2 (blades) or 3 (chains)	150mm	13-65mm	GRASS/HEDGE	90 L/min	220 Bar
SPI5 HD ROTARY HEAD	1.5m / 4' 11"	2 (blades) or 3 (chains)	150mm	13-65mm	GRASS/HEDGE	90 L/min	220 Bar
SPI2 SHD ROTARY HEAD	1.2m / 3' 11"	2 (chains)	150mm	65mm	GRASS/HEDGE	90 L/min	220 Bar

TWIGA CLASSIC	S50	S51	S55	FR55	VFR55	S60	FR60	VFR60	T65
SPECIFICATION									
Machine Weight*	1100kg	1200kg	1230kg	1280kg	1320kg	1250kg	1310kg	1340kg	1310kg
TRACTOR REQUIREMENTS									
Minimum Tractor Weight	2800kg	3250kg	3500kg	3750kg	3750kg	3750kg	4000kg	4000kg	4250kg
Tractor HP Guideline	80hp	80hp	80hp	80hp	80hp	80hp	80hp	80hp	80hp
TWIGA CONTROL SYSTEMS									
Progressive Cable Control System	□	□	□	—	—	□	—	—	—
Pilot Hydraulic Proportional Control System	■	■	■	■	■	■	■	■	■
MOUNTING									
Rear Three Point Linkage	■	■	■	■	■	■	■	■	■
Rear Three Point Linkage With Four Point Kit	□	□	□	□	□	□	□	□	□
Rear Three Point Linkage With Axle Bracket Subframe	□	□	□	□	□	□	□	□	□
ARM TYPES									
Standard Arm = S	■	■	■	—	—	■	—	—	—
Telescopic Arm = T	—	—	—	—	—	—	—	—	■
Forward Reach Arm = Fr	—	—	—	■	—	—	■	—	—
Variable Forward Reach Arm = VFR	—	—	—	—	■	—	—	■	—
Parallel Arm System	■	■	■	■	■	■	■	■	■
Hydraulic Parallel System	—	—	—	—	—	—	—	—	—
HYDRAULIC SYSTEM									
System	Gear	Gear	Gear	Gear	Gear	Gear	Gear	Gear	Gear
Pump	Iron	Iron	Iron	Iron	Iron	Iron	Iron	Iron	Iron
Pump Arrangement	Twin	Twin	Twin	Twin	Twin	Twin	Twin	Twin	Twin
Drive Type	Fully Independent	Fully Independent	Fully Independent	Fully Independent	Fully Independent	Fully Independent	Fully Independent	Fully Independent	Fully Independent
Tank Capacity	190 Ltrs	190 Ltrs	190 Ltrs	190 Ltrs	190 Ltrs	190 Ltrs	190 Ltrs	190 Ltrs	190 Ltrs
Horsepower	65hp	65hp	65hp	65hp	65hp	65hp	65hp	65hp	65hp
Flow Rate (L/Min)	90	90	90	90	90	90	90	90	90
KEY FEATURES & OPTIONS									
Cushioned Top Link	■	■	■	■	■	■	■	■	■
Hydraulic Slew	■	■	■	■	■	■	■	■	■
Automatic Reset	—	—	—	—	—	—	—	—	—
Dual Direction Rotor (Cable)	■	■	■	■	■	■	■	■	■
Head Float (Standard on Cable Controls)	□	□	□	□	□	□	□	□	□
Arm Float	□	□	□	□	□	□	□	□	□
Oil Cooler	□	□	□	□	□	□	□	□	□
Hydraulic Oil	■	■	■	■	■	■	■	■	■
Biodegradeable Oil	□	□	□	□	□	□	□	□	□
Narrow Lane Bracket	□	□	□	□	□	□	□	□	□
Mechanical Quick Release Kit (1 Set - M/F)	□	□	□	□	□	□	□	□	□
Hydraulic Quick Release Kit (1 Set - M/F)	□	□	□	□	□	□	□	□	□
Hydraulic Roller*	□	□	□	□	□	□	□	□	□
SAFETY EQUIPMENT									
Cab Guard Kit	■	■	■	■	■	■	■	■	■
Debris Blower And Mounting Kit	□	□	□	□	□	□	□	□	□
Warning Arrow Kit	□	□	□	□	□	□	□	□	□
LED Road Lighting Kit	■	■	■	■	■	■	■	■	■
Flashing LEDs	□	□	□	□	□	□	□	□	□

* Dependent on specification with oil less attachment

TWIGA CLASSIC	S50	S51	S55	FR55	VFR55	S60	FR60	VFR60	T65
MP COMPACT FLAILHEADS									
1.0m MP Compact Direct Drive Flail Head	—	—	—	—	—	—	—	—	—
MP1 FLAILHEADS									
1.2m MP1 Direct Drive Flail Head	✓	✓	✓	✓	✓	✓	✓	✓	✓
1.2m MP1 Belt Drive Flail Head	✓	✓	✓	✓	✓	✓	✓	✓	✓
1.5m MP1 Direct Drive Flail Head	✓	✓	✓	✓	✓	✓	✓	✓	✓
1.5m MP1 Belt Drive Flail Head	✓	✓	✓	✓	✓	✓	✓	✓	✓
MP2 FLAILHEADS									
1.2m MP2 Direct Drive Flail Head	✓	✓	✓	✓	✓	✓	✓	✓	✓
PB FLAILHEADS									
1.2m PB Belt Drive Flail Head	✓	✓	✓	✓	✓	✓	✓	✓	✓
1.2m PB Belt Drive Flail Head - HD Mulching Rotor	✓	✓	✓	✓	✓	✓	✓	✓	✓
1.6m PB Belt Drive Flail Head	—	✓	✓	—	—	✓	—	—	—
SP CUTTERBARS									
SP15 Cutterbar	✓	✓	✓	✓	✓	✓	✓	✓	✓
SP18 Cutterbar	✓	✓	✓	✓	✓	✓	✓	✓	✓
SP21 Cutterbar	✓	✓	✓	✓	✓	✓	✓	✓	✓
SP HD CUTTERBARS									
SP17 HD Cutterbar	✓	✓	✓	✓	✓	✓	✓	✓	✓
SP23 HD Cutterbar	✓	✓	✓	✓	✓	✓	✓	✓	✓
SP27 HD Cutterbar	✓	✓	✓	✓	✓	✓	✓	✓	✓
SP QUADSAWS									
SP15 Quadsaw	✓	✓	✓	✓	✓	✓	✓	✓	✓
SP20 Quadsaw	✓	✓	✓	✓	✓	✓	✓	✓	✓
SP25 Quadsaw	✓	✓	✓	✓	✓	✓	✓	✓	✓
SP ROTARY FINISHING HEADS									
SP13 Rotary Finishing Head	✓	✓	✓	✓	✓	✓	✓	✓	✓
SP ROTARY HEADS									
SP12 MD Rotary Head	✓	✓	✓	✓	✓	✓	✓	✓	✓
SP15 MD Rotary Head	✓	✓	✓	✓	✓	✓	✓	✓	✓
SP12 HD Rotary Head	✓	✓	✓	✓	✓	✓	✓	✓	✓
SP15 HD Rotary Head	—	✓	✓	—	—	✓	—	—	—
SP12 Super HD Rotary Head	—	✓	✓	—	—	✓	—	—	—
SP15 Super HD Rotary Head	—	—	—	—	—	—	—	—	—
SP ROTARY DITCH CLEANERS									
SP Ditch Cleaner	—	✓	✓	—	—	✓	—	—	—

SPEARHEAD

📍 Station Road, Salford Priors, Evesham, Worcestershire, WR11 8SW, England ☎ +44 (0)1789 491860

✉ enquiries@spearheadmachinery.com 🌐 spearheadmachinery.com 🐦 [SpearheadWorld](#)



designed and built in
GREAT BRITAIN 

Spearhead
is a member of the

Alamo Group

All information in this brochure is correct at the time of printing. Spearhead Machinery Limited has the right to change any of the data or descriptions at any time without prior warning. All dimensions are for reference.